

MINI2

MOST ACCURATE COMPACT OTDR

- SOLA (Smart Optical Link Analyzer)
- 5" Touch Screen with Smart GUI
- 8GB Internal Storage with Internal SD Card & External USB Memory
- Built-In VFL and Light Source
- Fast Booting Time
- Lightweight and Handheld




BELIEVE
YOUR
EYES.

DESCRIPTION

The MINI2 OTDR is used in the installation and maintenance of fiber optic cables. Features of the MINI2 OTDR include high precision test capabilities, fast response times, and easy to learn operation. The multi-point capacitive touch screen allows for user-friendly operation. The MINI2 OTDR offers accurate and fast test results and creates a report automatically. The MINI2 OTDR is compactly designed and very lightweight and hand-held.

CHARACTERISTICS



Simplify the Test Process



Measure Fiber Optical Link



5" Touch Screen with Smart GUI
High Brightness
Resolution of 800x480



Identify Fiber Fault Location



Magnify the Fiber End Face



Fast Booting Time


touch

OTDR



OTDR mode allows for measuring distance, loss, reflectivity, attenuation and accumulation loss on a fiber optical link.

SOLA

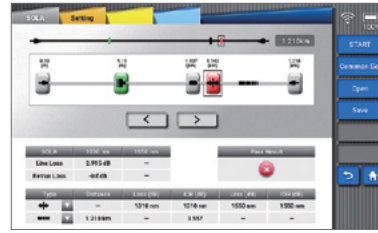

SOLA is an application for the OTDR, designed to simplify OTDR test process without the need to configure the parameters or analysis while parsing multiple complex OTDR curves.

VFL




VFL allows for finding direct fault locations in fiber test dead zones or performing fiber core calibration in multi-fiber cables.

FIBER MICROSCOPE



Fiber end tester (peripheral required) is mainly used to test the cleanliness and flatness of the fiber end face.

FILE MANAGER

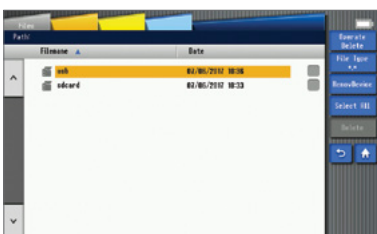

File Manger can provide powerful file management that users can manage their files conveniently.

LIGHT SOURCE



Invisible light source (1310 or 1550nm) can provide the following types of light, including CW light, 1kHz light, 2kHz light, 1kHz blink light, 2kHz blink light.

TECHNICAL SPECIFICATIONS

Model	MINI2
Display	5 inches, High Brightness TFT LCD, resolution of 800×480
Distance unit	m / km / mile / ft
Dynamic range	32dB / 30dB (1310nm / 1550nm)
Measurement range (km)	1.3, 2.5, 5, 10, 20, 40, 80, 120, 160, 260km
Measurement range (mile)	0.81, 1.55, 3.11, 6.22, 12.4, 24.8, 49.6, 74.6, 99.4, 161.5mile
Pulse width	5ns, 10ns, 20ns, 50ns, 100ns, 200ns, 500ns, 1μs, 2μs, 10μs, 20μs
Dead zone (Event/Attn./PON)	1m / 5m / 50m
Distance accuracy	±(1m+Distance×2.5×10 ⁻⁵ +Sampling resolution)
Linearity	0.03dB
Sampling points	110,000 points
Refractive index	1.000000 - 2.000000 (step: 0.000001)
Splitting ratio	Up to 1:32 splitter
Resolution	0.04m ~ 10.24m
Loss readout resolution	0.001dB
Battery capacity	Operating Time : Up to 12hours
File format	SOR, BMP, JPG, GDM, SOLA, PDF
External connection	USB 2.0
Compatible connector	APC(FC, SC, LC), UPC(FC, SC, LC, ST)
Power supply	AC Input 100-240V, 50-60Hz / DC Input 19V, 3.42A
VFL port	2.5mm ferrule type
VFL wavelength	650nm ±10nm
VFL distance	Up to 10km
VFL output power	20mW
Light source	Operating wavelength: 1310nm / 1550nm ±10nm
Light source output power	-5dBm

PACKAGE

OTDR	MINI2
Power cable / AC Adapter	ACC-25 / JS-180300
Carrying case	Soft case
Shoulder strap / Touch pen	✓
Calibration certificate	✓

GENERAL SPECIFICATIONS

Dimension	4.52H x 6.81W x 2.51D inches (115H x 173W x 64D mm, excluding rubber bumper)
Weight	1.98pounds (0.90kg with battery)
Operating conditions	-10~50℃
Storage conditions	-20~60℃
Relative humidity	0~95% (Noncondensing)



* The information on this catalog is subject to change without prior notice.

ORDERING INFORMATION

XXX - XXX - XXX - XXX - XXX - XXX - XXX

- Model** •
OTDR: MINI2
- Optical Configuration** •
SMF1: 1310/1550nm
- Basic Software** •
OTDR: OTDR application only
SOLA: SOLA application only
OS: OTDR & SOLA application
- Fiber Connector** •
CNT1: FC/APC CNT4: FC/UPC CNT7: ST/UPC
CNT2: SC/APC CNT5: SC/UPC
CNT3: LC/APC CNT6: LC/UPC
- Light Source** •
LS0: without VFL & Light Source
LS1: with VFL
LS2: with Light Source
LS3: with VFL & Light Source
- Micro Scope** •
MS0: without Micro Scope
MS1: with Micro Scope - V20
- Hard Case** •
HC0: without Hard Case
HC1: with Hard Case

Example: MINI2-SMF1-OS-CNT2-LS3-MS1_HC0

EI CONNECTOR



To improve the testing efficiency and optimize the OTDR function, APC connector is recommended to be applied and connected with SM port of MINI2, due to low reflectance caused by it. The reflection coefficient is the key parameter that will affect the OTDR performance and especially the dead zone. (The performance of the APC connector is better than that of the UPC connector).